


PORT HØJDE (3400 mm) / LYSMÅL
 Door height (3400 mm) / Day light height

Min. topsektionshøjde: 80F 200mm, 80W = 500 mm.
 Max. topsektion uden kobling og inkl. topprofil: 590 mm.
 Max. topsektion med kobling inkl. topprofil: 744 mm.
 Min. Top section height: 80F 200mm, 80W = 500 mm.
 Max. Top section without coupling incl. top profile: 590 mm.
 Max. Top section with coupling incl. top profile: 744 mm.

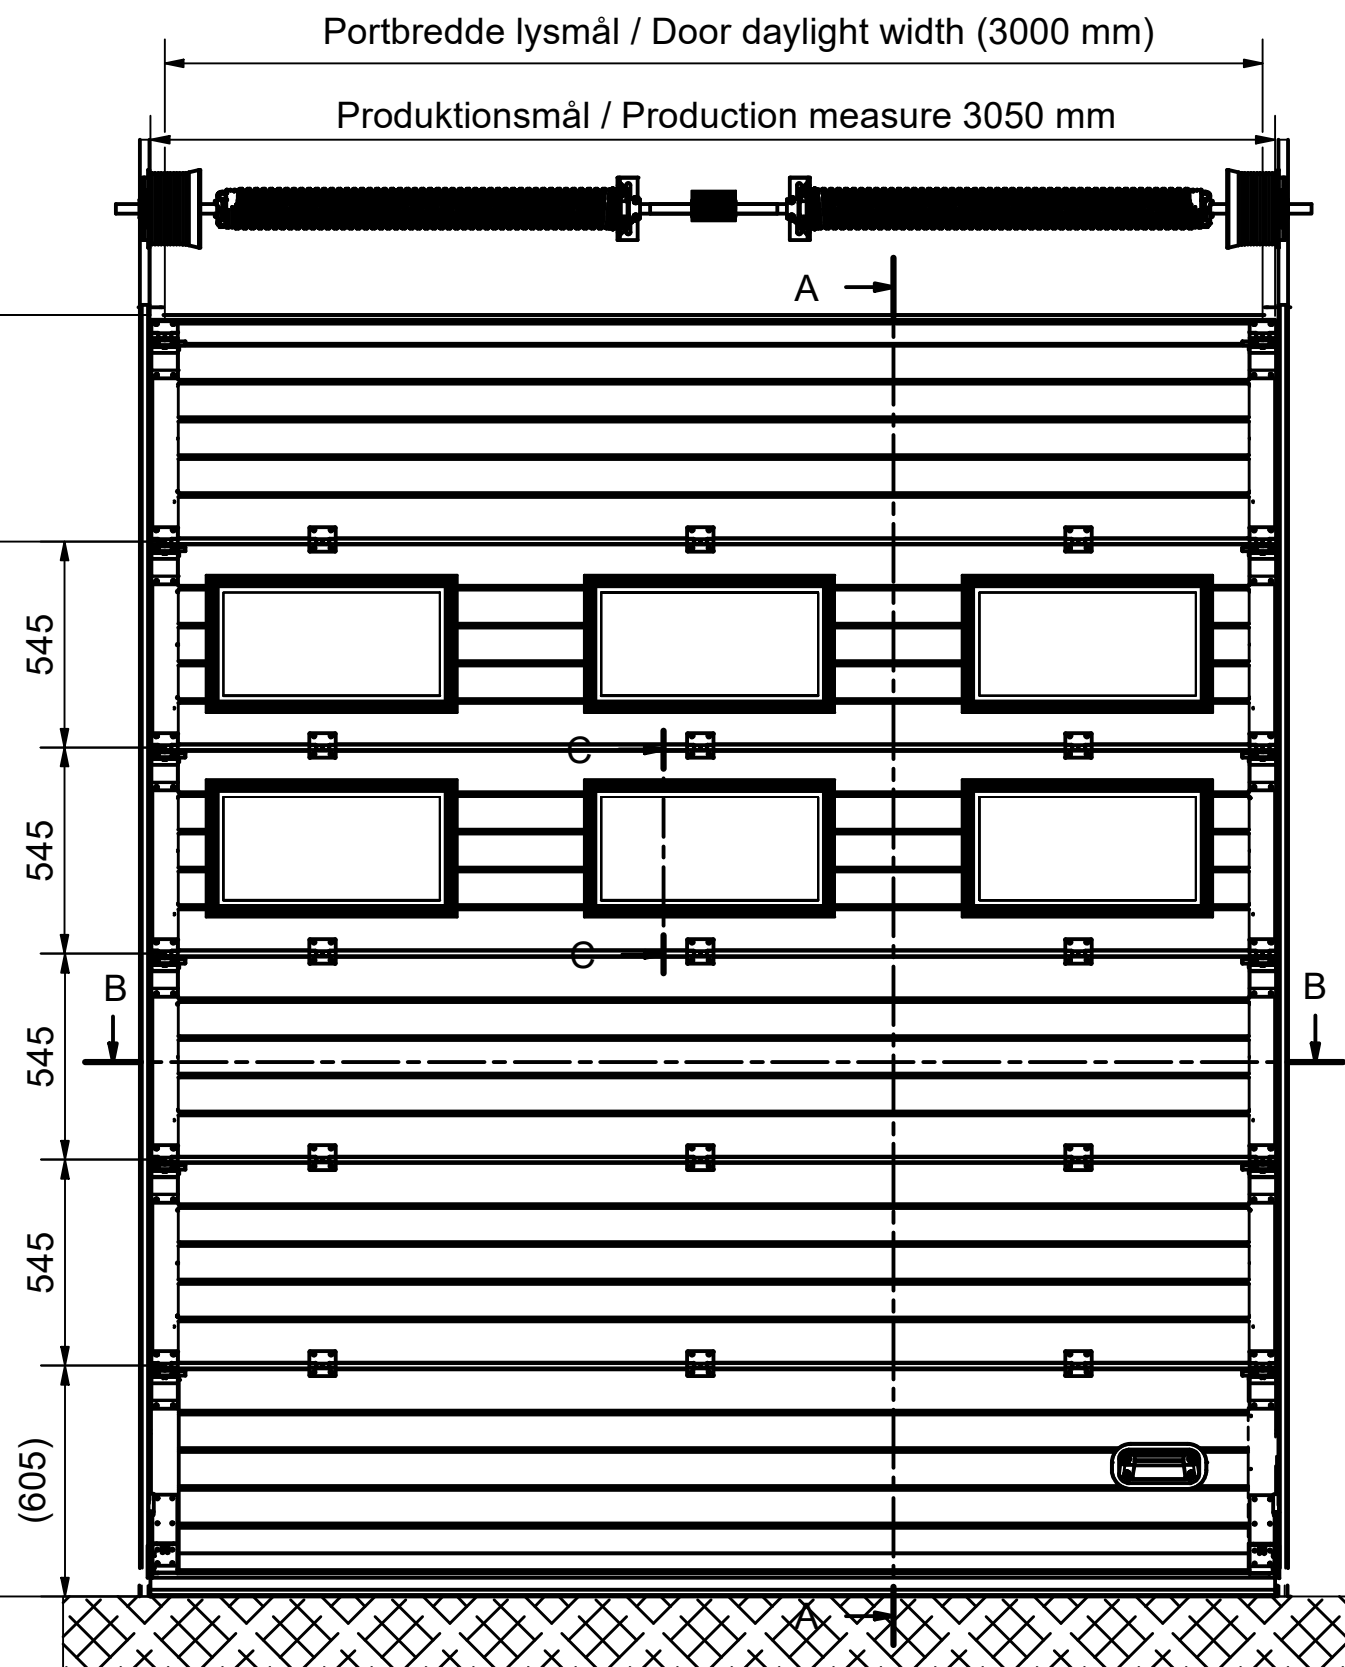

Beskrivelse EN / Description EN:

Nassau 8000 Overview

Beskrivelse DK / Description DK:

Nassau 8000 oversigttegning

Kontrolmål / Measurements for control: [Q1], [Q2], osv. / etc. Tolerancer / Tolerances:

Overflade før behandling / Surface Pre. Treatment: N/A

Overflade behandling / Surface Treatment:

Overflade Beskrivelse / Surface Description:

Bruttovægt / Gross weight:

Nettovægt / Net weight: 976,207 kg

NASSAU

Nassau Door A/S • Krogagervej 2 • DK-5750 Ringe
 Tlf.: 62 62 23 46 • Fax: 62 62 39 18
 info@nassau.dk • www.nassau.dk

Tegningsnr. / Drawing no.: Revision:

86-28000A 1

Konstr.ændr. / Constr. changes:

Format / Size: A3 Skala / Scale: 1:20

Tegnet / Drawn: 23-04-2020 Af / By: kkar

Materiale / Material:

Projektion / Projection:

